







EN 600x400 mm



320 Lt



700 mm

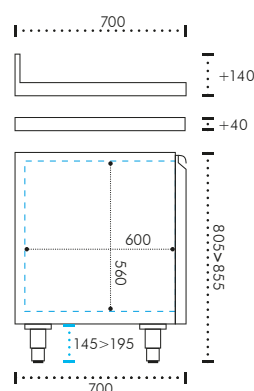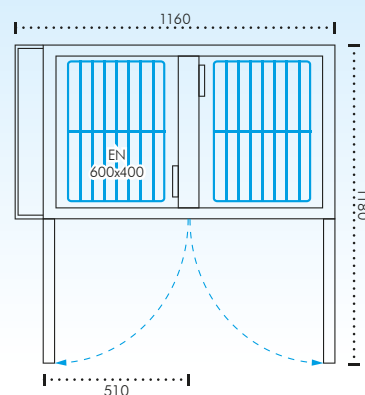

DIMENSIONI/Measures

VOLUME CON IMBALLO Volume with packaging		I.1450 x h.1100 x p.750 mm
PESO NETTO, SENZA PIANO Net weight, without top	0 ÷ +8 °C	59 Kg
	-18 ÷ -22 °C	61 Kg
PESO LORDO, SENZA PIANO Gross weight, without top	0 ÷ +8 °C	80 Kg
	-18 ÷ -22 °C	82 Kg
PIANO LISCIO Smooth top		+10 Kg
PIANO LISCIO CON ALZATINA Smooth top with splashback		+12 Kg
CAPACITÀ Capacity		320 Lt
PIEDINI INOX REGOLABILI Inox adjustable feet		145 ÷ 195 mm

CARATTERISTICHE/Details

MATERIALE DI COSTRUZIONE Building material		ACCIAIO INOX AISI 304 AISI 304 Stainless steel
TEMPERATURE DISPONIBILI Available temperatures		0 ÷ +8 °C
		-18 ÷ -22 °C
GAS REFRIGERANTE Refrigerating gas	0 ÷ +8 °C	R134a
	-18 ÷ -22 °C	R404a
REFRIGERAZIONE VENTILATA Ventilated refrigeration		x1 evaporatore centrale x1 central evaporator
SBRINAMENTO AUTOMATICO Automatic defrosting	0 ÷ +8 °C	A fermata semplice With simple stop
	-18 ÷ -22 °C	Con resistenza elettrica With electric resistor
EVAPORAZIONE CONDENSA Evaporation of the condensate		Con resistenza elettrica With electric resistor
VASCA D'EVAPORAZIONE CONDENSA Condensate evaporation basin		✓
TROPICALIZZAZIONE Tropicalization		✓
PORTE REVERSIBILI Reversible doors		✓

IMPIANTO ELETTRICO/Electric system

ALIMENTAZIONE Electrical supply		230V P+N+T/50 Hz
ASSORBIMENTO Power consumption	0 ÷ +8 °C	230W
	-18 ÷ -22 °C	540W
RESA FRIGORIFERA evap. -10 °C / cond. 32 °C, 60% UR *evap. -30 °C / cond. 32 °C, 60% UR Refrigeration yield	0 ÷ +8 °C	302W
	-18 ÷ -22 °C	*440W

DOTAZIONE/Equipment

GRIGLIE Shelves		x2 rilsan EN 600x400 mm
COPPIA GUIDE INOX Inox slides pair		x2 a "C"