



EN 600x400 mm



510 lt





700 mm

DIMENSIONI/Measures

VOLUME CON IMBALLO Volume with packaging		I.1950 x h.1100 x p.750 mm
PESO NETTO, SENZA PIANO Net weight, without top	0 ÷ +8 °C	101 Kg
	-18 ÷ -22 °C	124 Kg
PESO LORDO, SENZA PIANO Gross weight, without top	0 ÷ +8 °C	124 Kg
	-18 ÷ -22 °C	148 Kg
PIANO LISCIO Smooth top		+17 Kg
PIANO LISCIO CON ALZATINA Smooth top with splashback		+19 Kg
CAPACITÀ Capacity		510 Lt
PIEDINI INOX REGOLABILI Inox adjustable feet		145 ÷ 195 mm

CARATTERISTICHE/Details

MATERIALE DI COSTRUZIONE Building material		ACCIAIO INOX AISI 304 AISI 304 Stainless steel
TEMPERATURE DISPONIBILI Available temperatures		0 ÷ +8 °C
		-18 ÷ -22 °C
GAS REFRIGERANTE Refrigerating gas	0 ÷ +8 °C	R134a
	-18 ÷ -22 °C	R404a
REFRIGERAZIONE VENTILATA Ventilated refrigeration	0 ÷ +8 °C	x1 evaporatore centrale x1 central evaporator
	-18 ÷ -22 °C	x2 evaporatore centrale x2 central evaporator
SBRINAMENTO AUTOMATICO Automatic defrosting	0 ÷ +8 °C	A fermata semplice With simple stop
	-18 ÷ -22 °C	Con resistenza elettrica With electric resistor
EVAPORAZIONE CONDENSA Evaporation of the condensate	0 ÷ +8 °C	Con gas caldo With hot gas
	-18 ÷ -22 °C	Con resistenza elettrica With electric resistor
UNITÀ CONDENSANTE ESTRAIBILE Removable cooling unit		✓
TROPICALIZZAZIONE Tropicalization		✓
PORTE REVERSIBILI Reversible doors		✓

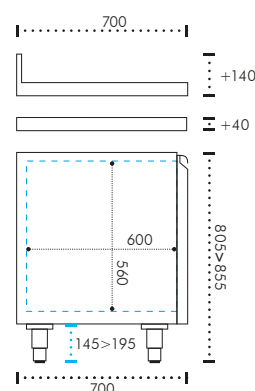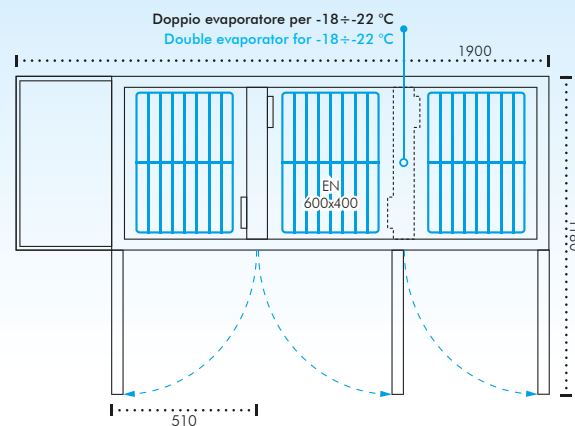

IMPIANTO ELETTRICO/Electric system

ALIMENTAZIONE Electrical supply		230V P+N+T/50 Hz
ASSORBIMENTO Power consumption	0 ÷ +8 °C	200W
	-18 ÷ -22 °C	1080W
RESA FRIGORIFERA evap. -10 °C / cond. 32 °C, 60% UR *evap. -30 °C / cond. 32 °C, 60% UR Refrigeration yield	0 ÷ +8 °C	302W
	-18 ÷ -22 °C	*800W

DOTAZIONE/Equipment

GRIGLIE Shelves		x3 rilsan EN 600x400 mm
COPPIA GUIDE INOX Inox slides pair		x3 a "C"